


HP 970 / 971



1. Remove the two balls with a gimlet/ink plug remover (reference GAWEHB02) next to the ink outlet

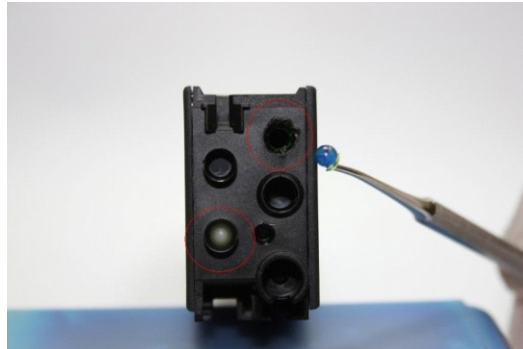

2. Fill both holes/chambers with ink until they are full.



3. Drag out approximately 10ml of ink because the printer creates a vacuum inside the cartridge bag



4. Replace the two removed balls by replacement balls/plugs (reference COKUG088)

**ORIGINAL OCP
INKS.**
...inks of finest
quality!

